




# BB100 SPACE-SAVER CONVERTIBLE BANQUET CARTERS

heated carters for  
8 3/4" to 10 1/2" plate diameter

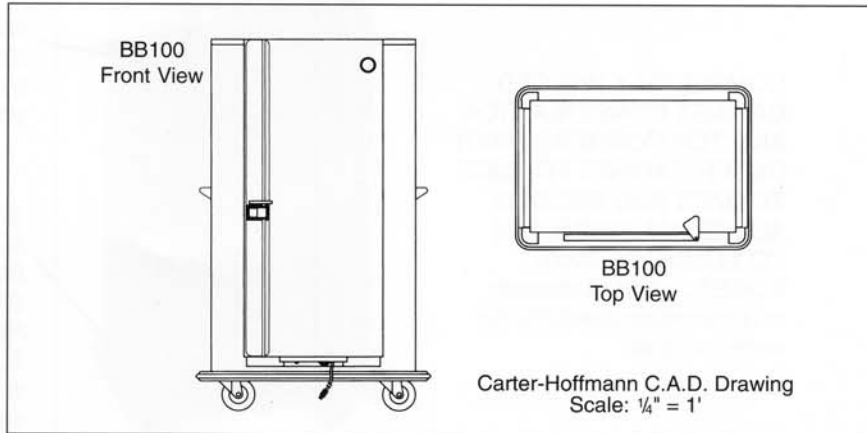

Model Number	Plate Capacity			Number of Shelves	Shelf Size	Clearance Between Shelves	Casters	Dimensions			Shipping Weight (Lbs.)
	Capacity with "P" Carriers (Quantity)	Capacity with Covered Plates (Quantity)	Optional Tray** Slides					High	Deep	Wide	
BB100	96 Plates in 12 (8P) Carriers	96 to 120* with or without 12 (8C) Carriers	15 pair at 3 1/2" (87 mm)** Vertical Spacing	4	33" x 26 9/16" (840 x 673 mm)	13 (330 mm)	6" Dia. (152 mm) 2 Swivel 2 Rigid	69 1/2" (1765 mm)	34" (863 mm)	41 1/2" (1054 mm)	378 (172 kgs)

\*Requires special shallow dome and plate. See "Clearance Between Shelves."

\*\*Tray slides may be used in lieu of shelves.

**CONSTRUCTION...** Completely welded cabinet construction and top corners, with outer cabinet formed to base and welded. All seams turned in to eliminate raw edges.

**CABINET MATERIALS...** Nickel-bearing type 300 series stainless steel, 20 gauge polished exterior wall, 24 gauge interior.

**BASE FRAME...** 12 gauge stainless steel full depth bolsters with 1" x 1" stainless steel perimeter channel supports.

**CASTERS...** 6" diameter, industrial grade caster with polyurethane tread, delrin sleeve axle bearing and double ball bearing swivel. ZerK grease fittings. Plate mounted and bolted to base in offset wheel ahead pattern. Two casters fitted with brakes.

**BUMPER...** Non-marking gray vinyl bumper set in heavy duty 3/16" extruded aluminum frame with reinforced corner "cut outs".

**INSULATION...** High density fiberglass insulation, 1" thick continuous wrap-around type.

**DOORS...** Double panel stainless steel doors completely welded. Cavity filled with high density fiberglass insulation. Decorative vinyl feature stripe.

**GASKETS...** High temperature silicone gasket mounted to cabinet.

**LATCHES...** Flush mounted, heavy duty sliding latch with exclusive grip handle.

**HINGES...** Concealed, stainless steel hinge with 5/16" pin.

**HANDLES (two)...** Horizontal full width 1" diameter stainless steel tubular handles.

**SHELVES...** Welded chrome plated removable wire shelves.

**CARRIERS...** "P" or "C" carriers are available. Specify type, if any, when ordering. "P" type holds 8 3/4" to 10 1/2" open plates, while "C" type holds up to 10 1/2" covered plates.

**TRAY SLIDES...** Optional stainless steel tray slide assemblies are interchangeable with wire shelves. Tray capacities are: 15 18" x 26" (GN 2/1) pans or 30 12" x 20" (GN 1/1) pans.

**THERMOMETER...** Dial type with sensing bulb and sensing bulb protector.

**HIGH PERFORMANCE HEATING SYSTEM...** Heavy duty, all stainless steel construction. Entire unit removable without tools. Removable, large capacity humidifying pan. 1600 watt inconel-sheathed heating element. Thermally protected fan motor with long life bearings. Full range thermostat and power indicating light.

**ELECTRICAL CHARACTERISTICS...** Operates on 120 volts, 60 cycle, single phase, 1600 watts, 14.1 amps. Ten foot wire rubber cord with 3 prong grounding plug NEMA 5-15P. Other voltages available. See options.

**PERFORMANCE...** Capable of heating to 200°F (90°C). Preheat to 160°F (70°C) in approximately 15 minutes.

#### ACCESSORIES/OPTIONS...

- Top Transport Latch
- Locking Paddle Latch
- Menu Card Holder
- Lexan Thermometer Cover
- Retractable Cord Reel
- Canned Head Adapters
- Pneumatic Caster
- Semi-Pneumatic Caster
- 4 Swivel Casters
- Tray Rack Assemblies
- 240 volt/50 cycle/2500 watts
- 240 volt/60 cycle/2500 watts
- 220 volt/50 cycle/2100 watts
- 220 volt/60 cycle/2100 watts



Specifications subject to change through product improvement & innovation.

## CARTER-HOFFMANN CORP.

1551 McCormick Ave., Mundelein, IL 60060  
Tel (847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981  
www.carter-hoffmann.com