




BB700, BB1100, BB1300 & BB1600 EQUAHEAT™ BANQUET CARTERS For Preplated Banquet Meals Canned or Electric Heat

CARTER-HOFFMANN
11 FOOD SERVICE EQUIPMENT
HEATED SERVERS



BB1300

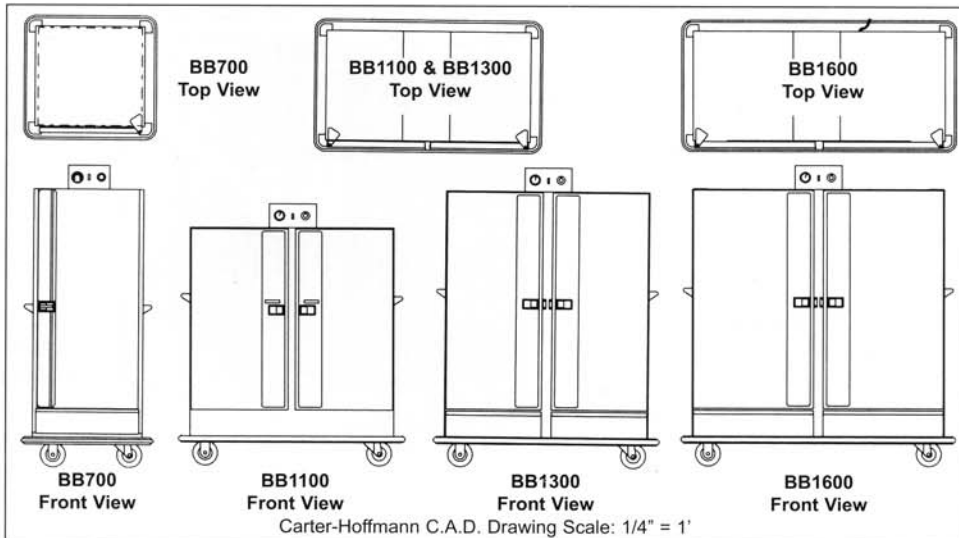

Carter-Hoffmann C.A.D. Drawing Scale: 1/4" = 1'

Model Number	Plate Capacity* (covered only) 8 3/4" - 11"	Number of Shelves	Clearance Between Shelves in mm		Overall Dimensions						Caster Diameter in mm		Shipping Weight lbs kgs	
					Height		Depth		Width					
					in	mm	in	mm	in	mm				
<input type="checkbox"/> BB700	60	3	15 7/8	403	74 5/8	1895	32	813	33	838	6	152	328	149
<input type="checkbox"/> BB1100	96	3	12 1/2	318	65	1651	32	813	55 5/8	1413	6	152	448	204
<input type="checkbox"/> BB1300	120	3	15 7/8	403	74 3/4	1899	32	813	55 5/8	1413	6	152	507	230
<input type="checkbox"/> BB1600	150	3	15 7/8	403	74 3/4	1899	32	813	67 1/2	1715	6	152	566	257

*Capacity depends on stacking height of plates and covers (see "Clearance Between Shelves"). Maximum diameter includes cover.

CONSTRUCTION... Completely welded cabinet construction with outer cabinet formed and welded to base. All seams turned in to eliminate raw edges.

CABINET MATERIAL... Nickel-bearing type 300 series stainless steel; 20 gauge polished exterior wall and 24 gauge interior.

BASE FRAME... 12 gauge stainless steel full depth caster bolsters with 1" x 1" 16 gauge tubular stainless steel perimeter supports welded to bolsters.

CASTERS... 6" diameter, industrial grade caster with polyurethane tread. Sealed roller axle bearing and double ball bearing swivel. Zerk grease fittings. Plate mounted and bolted to base in offset "wheel-ahead" pattern. Two casters fitted with brakes.

BUMPER... Non-marking gray vinyl bumper set in heavy-duty 3/16" thick extruded aluminum frame with reinforced corner cutouts.

INSULATION... 1" thick high density, continuous wrap-around type fiberglass insulation.

DOOR... Welded double panel stainless steel door. 20 gauge polished exterior and 20 gauge interior. Filled with 1" thick high-density fiberglass insulation.

HINGES... Concealed stainless steel hinges with 5/16" pin.

GASKETS... High temperature silicone gasket mounted to cabinet.

LATCHES... Flush mounted heavy duty sliding latch with exclusive grip handle.

PUSH HANDLES... Two horizontal full width 1" diameter stainless steel tubular handles.

SHELVES... Welded chrome plated removable wire shelves.

THERMOMETER... Dial type with remote sensing bulb and sensing bulb protector.

HEATING SYSTEM... Top mounted heater removable without tools. High impedance protected internally cooled fan motor. Adjustable full range thermostat, power indicating light and dial thermometer.

CANNED FUEL DRAWERS... Drawers can be accessed without opening cabinet doors. Each fitted with a safety latch to keep drawer securely closed during transport.

ELECTRICAL CHARACTERISTICS... Operators on 120 volts, 50/60 cycle, single phase, 1500 watts, 13 amps. Ten foot rubber cord with 3 prong grounding plug. NEMA 5-15P.

PERFORMANCE... Capable of heating to 200° F (94° C). Electric preheat to 160° F (71° C) in approximately 30 minutes. Canned heat performance depends on type of fuel containers.

ACCESSORIES/OPTIONS...

- Top Mounted Transport Latch
- Locking Paddle Latch
- Menu Card Holder
- Lexan Thermometer Cover
- 4 Wheel Brakes
- Alternate Wheel Sizes and Tread Types
- Alternate Electrical Configurations

Specifications subject to change through product improvement & innovation.

CARTER-HOFFMANN CORP.

1551 McCormick Ave., Mundelein, IL 60060
Tel (847) 362-5500 • (800) 323-9793 • Fax (847) 367-8981
www.carter-hoffmann.com



SPECIFICATIONS